

# Summit X450-G2 Series

SCALABLE ADVANCED AGGREGATION SWITCH WITH EXTREMEXOS MODULAR OPERATING SYSTEM

## PERFORMANCE

- 48-port or 24-port Gigabit Ethernet models
- 4 ports of SFP+ 10GbE/1GbE or 4 ports of SFP 1GbE on front faceplate
- All configurations Non-blocking full duplex
- Copper and PoE-Plus models
- Built-in 21Gbps stacking ports on rear panel for all models (SummitStack-V84)
- Optional SummitStack-V 40 Gbps stacking across two 10Gb front-panel ports

## FEATURES

- Secure Network Access through Role-based policy or Identity Management
- Front-to-Back airflow
- Modular PoE power supplies
- 850W of PoE-Plus budget with 1 PSU
- 1440W of PoE-Plus Budget with 2 PSUs
- Y.1731 OAM Measurements in hardware for accuracy
- Energy Efficient Ethernet - IEEE 802.3az



The Summit® X450-G2 series is based on Extreme Networks® revolutionary ExtremeXOS®, a highly resilient OS that provides continuous uptime, manageability and operational efficiency. Each switch offers the same high-performance, non-blocking hardware technology, in the Extreme Networks tradition of simplifying network deployments through the use of common hardware and software throughout the network.

The Summit X450-G2 switches are effective campus edge switches with IEEE 802.3at PoE-plus. The Summit X450-G2 series is also an option for DSLAM or CMTS aggregation, or for active Ethernet access.

## Comprehensive Security Management

- Role-based policy and host integrity enforcement, and identity management
- Universal Port Dynamic Security Profiles to provide fine granular security policies in the network
- Threat detection and response instrumentation to react to network intrusion with CLEAR-Flow Security Rules Engine
- Denial of Service (DoS) protection and IP security against man-in-the-middle and DoS attacks to harden the network infrastructure
- Role-based Policy enables support for policy profiles to secure and provision network resources based upon the role the user or device plays within the network.

## Flexible Port Configuration

All models come equipped with either 4 ports of SFP+ 10 GbE or 4 ports of SFP 1GbE resident on the faceplate of each model.

## High-Performance Stacking

Up to eight Summit X450-G2 switches can be stacked using two different methods

of stacking: SummitStack-V, and SummitStack-V84. Each X450-G2 unit comes equipped with 2 ports of 21 Gigabit stacking ports via a QSFP interface. Standard passive 40Gb copper cables can be used for stacking X450-G2s together.

### **SUMMITSTACK-V — FLEXIBLE STACKING OVER 10 GIGABIT ETHERNET**

ExtremeXOS supports the SummitStack-V capability using 2 of the native 10 GbE ports on the faceplate as stacking ports, enabling the use of standard cabling and optics technologies used for 10 GbE SFP+, SummitStack-V provides long-distance stacking connectivity of up to 40 km while reducing the cable complexity of implementing a stacking solution. SummitStack-V is compatible with Summit X440, X450-G2 switches with 10Gb uplinks, X460, X460-G2 with 10Gb uplinks, X480, X670, X670V, X670-G2 and X770 switches running the same version of ExtremeXOS. SummitStack-V enabled 10 GbE ports must be physically direct-connected.

### **SUMMITSTACK-V84 — HIGH-SPEED STACKING OVER DEDICATED STACKING PORTS**

The Summit X450-G2 also supports high-speed 84 Gbps stacking, which is ideal for demanding applications where a high volume of traffic traverses through the stacking links, yet bandwidth is not compromised through stacking.

SummitStack-V84 is supported over passive copper QSFP cables (up to 7m). SummitStack-V84 is only supported on Summit X450-G2 switches running the same version of ExtremeXOS.

*NOTE: SummitStack-V84 is NOT interoperable with SummitStack-V80*

### **INTELLIGENT SWITCHING**

Summit X450-G2 supports sophisticated and intelligent Layer 2 switching, as well as Layer 3 IPv4/IPv6 routing including policy-based switching/routing, Provider Bridges, bidirectional ingress and egress Access Control Lists, and bandwidth control by 8 Kbps granularity both for ingress and egress.

### **IEEE 802.3AT POE-PLUS**

IEEE 802.3af Power over Ethernet has been widely used in the campus enterprise edge network for Ethernet-powered devices such as wireless access points, Voice over IP phones, and security cameras. Ethernet port extenders such as Extreme Networks ReachNXT™ 100-8t can also utilize PoE, making installation and management easier and reducing maintenance costs. The newer IEEE 802.3at PoE-plus standard expands upon Power over Ethernet by increasing the power limit up to 30 watts, and by standardizing power negotiation by using LLDP. Summit X450-G2 supports IEEE 802.3at PoE-plus and supports standards-compliant PoE devices today and into the future.

### **ROLE-BASED POLICY**

Utilizing NetSight Policy Management, the role-based policy framework empowers a network administrator to define distinct roles or profiles that represent industry specific operational groups that may exist in an education or a business environment (e.g., administrator, teacher, student, guest). Each defined role is granted individualized access to specific network services and applications and these access privileges remain associated with users as they move across both wired and wireless network access points.

Users can be authenticated via IEEE 802.1X, MAC address, or web authentication, and then assigned a pre-defined operational role. Network operations can be seamlessly tailored to meet business-oriented requirements by providing each role with individualized access to network services and applications, thus aligning network resource utilization with business goals and priorities.

### AUDIO VIDEO BRIDGING

The X450-G2 series supports IEEE 802.1 Audio Video Bridging (AVB) to enable reliable, real-time audio/video transmission over Ethernet. AVB technology delivers the quality of service required for today's high-definition and time-sensitive multimedia streams.

### ORDERING NOTES

The X450-G2 base switches do not ship with fan trays - these must be ordered separately. The X450-G2 PoE switches support modular power supplies and these must be ordered separately. The non-PoE X450-G2 switches have a fixed internal power supply so a power supply does not need to be ordered separately.

## Specifications

### PERFORMANCE/SCALE

SWITCH MODEL	MAXIMUM ACTIVE GBE PORTS	MAXIMUM ACTIVE 10GBE PORTS	21GBPS STACKING PORTS	AGGREGATED SWITCH BANDWIDTH*	FRAME FORWARDING RATE*
Summit X450-G2-24t-10GE4	24	4	2	212 Gbps	157.7 Mpps
Summit X450-G2-48t-10GE4	48	4	2	260 Gbps	193.4 Mpps
Summit X450-G2-24p-10GE4	24	4	2	212 Gbps	157.7 Mpps
Summit X450-G2-48p-10GE4	48	4	2	260 Gbps	193.4 Mpps
Summit X450-G2-24t-GE4	28	0	2	140 Gbps	104.2 Mpps
Summit X450-G2-48t-GE4	52	0	2	188 Gbps	139.9 Mpps
Summit X450-G2-24p-GE4	28	0	2	140 Gbps	104.2 Mpps
Summit X450-G2-48p-GE4	52	0	2	188 Gbps	139.9 Mpps

\*Includes stacking ports.

- Less than 4 microsecond latency (64-byte)
- Layer 2/MAC Addresses: 68K
- IPv4 LPM Entries: 16K
- IPv6 LPM (64-bit) Entries: 8K
- IPv6 LPM (128-bit) Entries: 256
- 4094 VLAN/VMANs
- 9216 Byte Max Packet Size (Jumbo Frame)
- 128 load sharing trunks, up to 32 members per trunk
- 1,024 ingress bandwidth meters
- Ingress and egress bandwidth policing/rate limiting per flow/ACL
- 8 QoS egress queues/port
- Egress bandwidth rate shaping per egress queue and per port
- Rate Limiting Granularity: 8 Kbps
- All ports Full Duplex - half duplex operation is not supported
- Policy Capabilities
  - Policy Profiles: 63
  - Rules per Profile: Up to 928
  - Authenticated Policy Users per Switch: Up to 1024
  - Authenticated Policy Users per Port: Up to 1024
- Unique Permit/Deny Rules per switch: 952
  - MAC Rules: 256
  - IPv4 Rules: 256
  - IPv6 Rules: 256
  - L2 Rules: 184
- Rate Limiting: Per Class of Service

## EXTERNAL PORTS

SWITCH HARDWARE	PORTS
<b>Summit X450-G2-24t-10GE4</b>	<ul style="list-style-type: none"> <li>• 24 x 10/100/1000BASE-T (RJ-45)</li> <li>• 4 x 10GBASE-X SFP+ (unpopulated ports)</li> <li>• 1 x Serial (console port RJ-45) with RTS/CTS modem control</li> <li>• 1 x 10/100/1000BASE-T out-of-band management port</li> <li>• 1 x USB 2.0 port for external USB flash</li> <li>• 2 dedicated QSFP-form factor 21Gbps stacking ports on the rear panel</li> </ul>
<b>Summit X450-G2-48t-10GE4</b>	<ul style="list-style-type: none"> <li>• 48 x 10/100/1000BASE-T (RJ-45)</li> <li>• 4 x 10GBASE-X SFP+ (unpopulated ports)</li> <li>• 1 x Serial (console port RJ-45) with RTS/CTS modem control</li> <li>• 1 x 10/100/1000BASE-T out-of-band management port</li> <li>• 1 x USB 2.0 port for external USB flash</li> <li>• 2 dedicated QSFP-form factor 21Gbps stacking ports on the rear panel</li> </ul>
<b>Summit X450-G2-24p-10GE4</b>	<ul style="list-style-type: none"> <li>• 24 x 10/100/1000BASE-T PoE-Plus</li> <li>• 4 x 10GBASE-X SFP+ (unpopulated ports)</li> <li>• 1 x Serial (console port RJ-45) with RTS/CTS modem control</li> <li>• 1 x 10/100/1000BASE-T out-of-band management port</li> <li>• 1 x USB 2.0 port for external USB flash</li> <li>• 2 dedicated QSFP-form factor 21Gbps stacking ports on the rear panel</li> </ul>
<b>Summit X450-G2-48p-10GE4</b>	<ul style="list-style-type: none"> <li>• 48 x 10/100/1000BASE-T PoE-Plus</li> <li>• 4 x 10GBASE-X SFP+ (unpopulated ports)</li> <li>• 1 x Serial (console port RJ-45) with RTS/CTS modem control</li> <li>• 1 x 10/100/1000BASE-T out-of-band management port</li> <li>• 1 x USB 2.0 port for external USB flash</li> <li>• 2 dedicated QSFP-form factor 21Gbps stacking ports on the rear panel</li> </ul>
<b>Summit X450-G2-24t-GE4</b>	<ul style="list-style-type: none"> <li>• 24 x 10/100/1000BASE-T (RJ-45)</li> <li>• 4 x 1GBASE-X SFP (unpopulated ports)</li> <li>• 1 x Serial (console port RJ-45) with RTS/CTS modem control</li> <li>• 1 x 10/100/1000BASE-T out-of-band management port</li> <li>• 1 x USB 2.0 port for external USB flash</li> <li>• 2 dedicated QSFP-form factor 21Gbps stacking ports on the rear panel</li> </ul>
<b>Summit X450-G2-48t-GE4</b>	<ul style="list-style-type: none"> <li>• 48 x 10/100/1000BASE-T (RJ-45)</li> <li>• 4 x 1GBASE-X SFP (unpopulated ports)</li> <li>• 1 x Serial (console port RJ-45) with RTS/CTS modem control</li> <li>• 1 x 10/100/1000BASE-T out-of-band management port</li> <li>• 1 x USB 2.0 port for external USB flash</li> <li>• 2 dedicated QSFP-form factor 21Gbps stacking ports on the rear panel</li> </ul>
<b>Summit X450-G2-24p-GE4</b>	<ul style="list-style-type: none"> <li>• 24 x 10/100/1000BASE-T PoE-Plus</li> <li>• 4 x 1GBASE-X SFP (unpopulated ports)</li> <li>• 1 x Serial (console port RJ-45) with RTS/CTS modem control</li> <li>• 1 x 10/100/1000BASE-T out-of-band management port</li> <li>• 1 x USB 2.0 port for external USB flash</li> <li>• 2 dedicated QSFP-form factor 21Gbps stacking ports on the rear panel</li> </ul>
<b>Summit X450-G2-48p-GE4</b>	<ul style="list-style-type: none"> <li>• 48 x 10/100/1000BASE-T PoE-Plus</li> <li>• 4 x 1GBASE-X SFP (unpopulated ports)</li> <li>• 1 x Serial (console port RJ-45) with RTS/CTS modem control</li> <li>• 1 x 10/100/1000BASE-T out-of-band management port</li> <li>• 1 x USB 2.0 port for external USB flash</li> <li>• 2 dedicated QSFP-form factor 21Gbps stacking ports on the rear panel</li> </ul>

## PHYSICAL

SWITCH MODEL	WEIGHT	PHYSICAL DIMENSION
Summit X450-G2-24t-10GE4	13.71 lb (6.22 kg)	Height: 1 RU / 1.73 inches (4.4 cm) Width: 17.4 inches (44.1 cm) Depth: 19.2 inches (43.2 cm)
Summit X450-G2-48t-10GE4	14.22 lb (6.45 kg)	
Summit X450-G2-24t-GE4	13.71 lb (6.22 kg)	
Summit X450-G2-48t-GE4	14.22 lb (6.45 kg)	
Summit X450-G2-24p-10GE4	13.93 lb (6.32 kg)	
Summit X450-G2-48p-10GE4	14.51 lb (6.58 kg)	
Summit X450-G2-24p-GE4	13.93 lb (6.32 kg)	
Summit X450-G2-48p-GE4	14.51 lb (6.58 kg)	
Summit Front-to-Back fan module	1.0 lb (0.46 kg)	Height: 1.59 inches (4.04 cm) Width: 4.8 inches (12.2 cm) Depth: 6.2 inches (15.75 cm)

NOTE: Switch weights include installed fan module. PoE switches do not include PSUs.

\* Please refer to the Summit Family Switches Hardware Installation Guide for packaged weight and dimensions.

## CPU/MEMORY

- 64-bit MIPS Processor, 1 GHz clock, dual core
- 1GB ECC DDR3 DRAM
- 4GB eMMC Flash
- 4MB packet buffer

## LED INDICATORS

- Per port status LED including power status
- System Status LEDs: management, fan and power
- 7 segment display of stack number

## POWER

SWITCH MODEL	MINIMUM HEAT DISSIPATION	MINIMUM POWER CONSUMPTION	MAXIMUM HEAT DISSIPATION	MAXIMUM POWER CONSUMPTION
Summit X450-G2-24t-10GE4	149.4	43.8	244.6	71.1
Summit X450-G2-48t-10GE4	178.1	52.2	290.0	85.0
Summit X450-G2-24p-10GE4	214.3	62.8	604.7	127.2
Summit X450-G2-48p-10GE4	238.8	70.0	778	228
Summit X450-G2-24t-GE4	149.4	43.8	244.6	71.1
Summit X450-G2-48t-GE4	178.1	52.2	290.0	85.0
Summit X450-G2-24p-GE4	214.3	62.8	604.7	127.2
Summit X450-G2-48p-GE4	238.8	70.0	778	228

## THE NON-POE SWITCHES

	FIXED INTERNAL POWER SUPPLY
Voltage Input Range	100-240 VAC †
Line Frequency Range	47 to 63 Hz
Power Supply Input Socket	IEC 320 C14
Power Cord Input Plug	IEC 320 C13
Operating Temperature	0° C to 50° C Normal Operation

## POE POWER SUPPLY UNITS (ONLY FRONT-TO-BACK SUPPLIES ARE SUPPORTED)

	715W AC PSU (10951)	1100W AC PSU (10941)
Dimensions	Height 40 mm (1.56 inches) Width 82.5 mm (3.25 inches) Depth 287 mm (11.3 inches)	Height 40 mm (1.56 inches) Width 82.5 mm (3.25 inches) Depth 287 mm (11.3 inches)
Weight	1.16kg (2.55 lbs)	1.16kg (2.55 lbs)
Voltage Input Range	100-127/200-240 VAC †	100-127/200-240 VAC †
Line Frequency Range	47 to 63 Hz	47 to 63 Hz
Power Supply Input Socket	IEC 320 C16	IEC 320 C16
Power Cord Input Plug	IEC 320 C15	IEC 320 C15
Operating Temperature	0° C to 50° C Normal Operation	0° C to 50° C Normal Operation

† - The power supplies will continue to operate +/- 10% of the rated input to accommodate temporary loss of input voltage regulation

## POE-PLUS POWER BUDGET

SWITCH MODEL	1 PSU OF 715W	1 PSU OF 1100W	2 PSUS OF 715W	1 PSU OF 715W AND 1 PSU OF 1100W	2 PSUS OF 1100W
Summit X450-G2-24p-10GE4	500 W	720 W	720 W	720 W	720 W
Summit X450-G2-48p-10GE4	500 W	850 W	1031 W	1350 W	1440 W
Summit X450-G2-24p-GE4	500 W	720 W	720 W	720 W	720 W
Summit X450-G2-48p-GE4	500 W	850 W	1031 W	1350 W	1440 W
Summit X450-G2-24p-10GE4	16 ports @ 30W 24 ports @ 15.4W	24 ports @ 30W 24 ports @ 15.4W	24 ports @ 30W 24 ports @ 15.4W	24 ports @ 30W 24 ports @ 15.4W	24 ports @ 30W 24 ports @ 15.4W
Summit X450-G2-48p-10GE4	16 ports @ 30W 32 ports @ 15.4W	28 ports @ 30W 48 ports @ 15.4W	34 ports @ 30W 48 ports @ 15.4W	45 ports @ 30W 48 ports @ 15.4W	48 ports @ 30W 48 ports @ 15.4W
Summit X450-G2-24p-GE4	16 ports @ 30W 24 ports @ 15.4W	24 ports @ 30W 24 ports @ 15.4W	24 ports @ 30W 24 ports @ 15.4W	24 ports @ 30W 24 ports @ 15.4W	24 ports @ 30W 24 ports @ 15.4W
Summit X450-G2-48p-GE4	16 ports @ 30W 32 ports @ 15.4W	28 ports @ 30W 48 ports @ 15.4W	34 ports @ 30W 48 ports @ 15.4W	45 ports @ 30W 48 ports @ 15.4W	48 ports @ 30W 48 ports @ 15.4W

## ENVIRONMENTAL SPECIFICATIONS

- EN/ETSI 300 019-2-1 v2.1.2 - Class 1.2 Storage
- EN/ETSI 300 019-2-2 v2.1.2 - Class 2.3 Transportation
- EN/ETSI 300 019-2-3 v2.1.2 - Class 3.1e Operational
- EN/ETSI 300 753 (1997-10) - Acoustic Noise
- ASTM D3580 Random Vibration Unpackaged 1.5 G

## OPERATING CONDITIONS

- TTemp: 0° C to 50° C (32° F to 122° F)
- Humidity: 10% to 95% relative humidity, non-condensing
- Altitude: 0 to 5,000 meters (16,404 feet) - PoE switches
- Altitude: 0 to 2,000 meters (6,562 feet) - non-PoE switches
- Shock (half sine): 30 m/s<sup>2</sup> (3 G), 11 ms, 6 shocks
- Random vibration: 3 to 500 Hz at 1.5 G rms

## PACKAGING AND STORAGE SPECIFICATIONS

- Temp: -40° C to 70° C (-40° F to 158° F)
- Humidity: 10% to 95% relative humidity, non-condensing
- Packaged Shock (half sine): 180 m/s<sup>2</sup> (18 G), 6 ms, 600 shocks
- Packaged Vibration: 5 to 62 Hz at velocity 5 mm/s, 62 to 500 Hz at 0.2 G
- Packaged Random Vibration: 5 to 20 Hz at 1.0 ASD w/-3 dB/oct. from 20 to 200 Hz
- Packaged Drop Height: 14 drops minimum on sides and corners at 42 inches (<15 kg box)

## REGULATORY AND SAFETY

### North American ITE

- UL 60950-1 2nd Ed., Listed Device (U.S.)
- CSA 22.2 #60950-1-03 2nd Ed. (Canada)
- Complies with FCC 21CFR 1040.10 (U.S. Laser Safety)
- CDRH Letter of Approval (US FDA Approval)

### European ITE

- EN 60950-1:2007 2nd Ed.
- EN 60825-1+A2:2001 (Lasers Safety)
- TUV-R GS Mark by German Notified Body
- 2006/95/EC Low Voltage Directive

### International ITE

- CB Report & Certificate per IEC 60950-1 2nd Ed. + National Differences
- AS/NZX 60950-1 (Australia /New Zealand)

## EMI/EMC STANDARDS

### North American EMC for ITE

- FCC CFR 47 part 15 Class A (USA)
- ICES-003 Class A (Canada)

### European EMC Standards

- EN 55022:2006+A1:2007 Class A
- EN 55024:A2-2003 Class A includes IEC 61000-4-2, 3, 4, 5, 6, 11
- EN 61000-3-2,8-2006 (Harmonics)
- EN 61000-3-3 2008 (Flicker)
- ETSI EN 300 386 v1.4.1, 2008-04 (EMC Telecommunications)
- 2004/108/EC EMC Directive

## International EMC Certifications

- CISPR 22: 2006 Ed 5.2, Class A (International Emissions)
- CISPR 24:A2:2003 Class A (International Immunity)
- IEC 61000-4-2:2008/EN 61000-4-2:2009 Electrostatic Discharge, 8kV Contact, 15 kV Air, Criteria A
- IEC 61000-4-3:2008/EN 61000-4-3:2006+A1:2008 Radiated Immunity 10V/m, Criteria A
- IEC 61000-4-4:2004 am1 ed.2./EN 61000-4-4:2004/A1:2010 Transient Burst, 1 kV, Criteria A
- IEC 61000-4-5:2005 /EN 61000-4-5:2006 Surge, 2 kV L-L, 2 kV L-G, Level 3, Criteria A
- IEC 61000-4-6:2008/EN 61000-4-6:2009 Conducted Immunity, 0.15-80 MHz, 10V/m unmod. RMS, Criteria A
- IEC/EN 61000-4-11:2004 Power Dips & Interruptions, >30%, 25 periods, Criteria C

## COUNTRY SPECIFIC

- VCCI Class A (Japan Emissions)
- ACMA (C-Tick) (Australia Emissions)
- CCC Mark
- KCC Mark, EMC Approval (Korea)

## TELECOM STANDARDS

- ETSI EN 300 386:2001 (EMC Telecommunications)
- ETSI EN 300 019 (Environmental for Telecommunications)
- CE 2.0 Compliant

## IEEE 802.3 MEDIA ACCESS STANDARDS

- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-X
- IEEE 802.3ae 10GBASE-X
- IEEE 802.3at PoE Plus
- IEEE 802.3az (EEE)

## FAN AND ACOUSTIC NOISE

SWITCH MODEL	ACOUSTIC INFORMATION	
Summit X450-G2-24t-10GE4	Fixed AC or DC PS with Front to Back (FB) Air Flow	
	Bystander Sound Pressure* 49.8 dB(A), 0C to 39C 64.9 dB(A), 50C	Declared Sound Power (LWAd)** 6.1 bels, 0C to 39C 7.6 bels, 50C
Summit X450-G2-48t-10GE4	Fixed AC or DC PS with Front to Back (FB) Air Flow	
	Bystander Sound Pressure* 49.9 dB(A), 0C to 39C 64.8 dB(A), 50C	Declared Sound Power (LWAd)** 6.1 bels, 0C to 39C 7.6 bels, 50C
Summit X450-G2-24p-10GE4	Dual 715W AC or DC PS with Front to Back (FB) Air Flow	
	Bystander Sound Pressure* 51.1 dB(A), 0C to 39C 65.5 dB(A), 50C	Declared Sound Power (LWAd)** 6.2 bels, 0C to 39C 7.7 bels, 50C
	Dual 715W AC or DC PS with Front to Back (FB) Air Flow (with applied POE Load)	
	Bystander Sound Pressure* 50.1 dB(A), 0C to 39C 64.5 dB(A), 50C	Declared Sound Power (LWAd)** 6.1 bels, 0C to 39C 7.6 bels, 50C
Summit X450-G2-48p-10GE4	Dual 1100W AC or DC PS with Front to Back (FB) Air Flow	
	Bystander Sound Pressure* 50.8 dB(A), 0C to 39C 65.4 dB(A), 50C	Declared Sound Power (LWAd)** 6.2 bels, 0C to 39C 7.6 bels, 50C
	Dual 1100W AC or DC PS with Front to Back (FB) Air Flow (with applied POE Load)	
	Bystander Sound Pressure* 56.5 dB(A), 0C to 39C 66.8 dB(A), 50C	Declared Sound Power (LWAd)** 6.8 bels, 0C to 39C 7.8 bels, 50C

\* Sound Pressure is presented for comparison per ISO 7779

\*\*Declared Sound Power is presented in accordance with ISO-7779, ISO 9296 per ETSI/EN 300 753



## Accessories

### MODULAR FAN TRAY FOR ALL X450-G2 SWITCHES

Summit X460/X450-G2 fan module FB	Front-to-back airflow fan module for Summit X460/X450-G2 series switches
-----------------------------------	--

### EXTERNAL REDUNDANT POWER SUPPLIES FOR NON-POE SWITCHES

All Summit X450-G2 series non-PoE switches ship with one fixed internal power supply. If redundancy is required, an external RPS can be attached to the switch.

### MODULAR POWER SUPPLIES FOR POE X450-G2 SWITCHES

STK-RPS-150PS	150 watt non-PoE redundant power supply for A, B, C and X450-G2 switches
EPS-C2	External Power System Chassis 2. Accepts up to three Summit 750W AC PoE PSU 48V power supplies. Accepts up to 5 EPS-CBL-2x7 or up to 1 EPS-CBL-2x9 cables.
EPS-CBL-2x7	External Power System Cable (1M) that connects EPS to any Summit X440 or X450-G2 non-PoE switch for providing redundant DC power.
Summit 750W AC PSU	AC Power Supply module for EPS-C2 Chassis Redundant Power Supply

All Summit X450-G2 series PoE switches support modular power supplies and do NOT ship with a power supply. Either a 715 watt or 1100 watt power supply needs to be added.


Only front-to-back power supplies and fans are certified for use in the X450-G2 PoE switches.

Summit 715W PoE AC PSU FB	Summit 715W PoE AC PSU with front-to-back airflow is compatible with Summit X450-G2-24p/48p switches and provides 500 watts of PoE-plus power budget per one supply. When two PSUs are installed, the total PoE-plus power budget becomes 1031 watts.
Summit 1100W PoE AC PSU FB	Summit 1100W PoE AC PSU with front-to-back airflow is compatible with Summit X450-G2-24p/48p switches and provides 850 watts of PoE-plus power budget per one supply. When two PSUs are installed, the total PoE-plus power budget becomes 1440 watts.


## Warranty

- Ltd. Lifetime with eAHR-2
- For warranty details, visit <http://www.extremenetworks.com/go/warranty>

### NON-POE SWITCH - FAN TRAY MUST BE ORDERED SEPARATELY

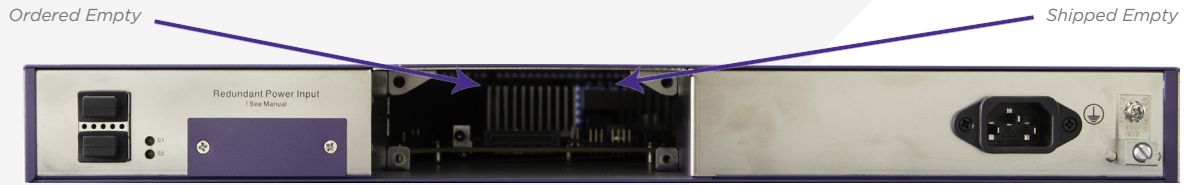

### POE SWITCH - FAN TRAY AND POWER SUPPLIES MUST BE ORDERED SEPARATELY

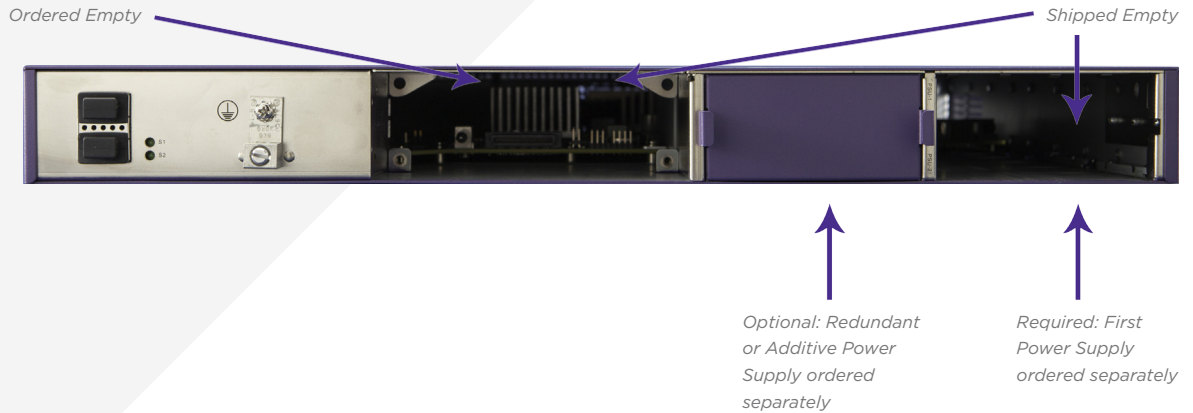

## Ordering Information

NOTE: PoE Power Supplies and fan tray MUST be ordered separately. Only non-PoE switches ships with a fixed internal power supply

PART NUMBER	NAME	DESCRIPTION
16172	X450-G2-24t-GE4-Base	Summit X450-G2 24 10/100/1000BASE-T, 4 1000BASE-X unpopulated SFP, two 21Gb stacking ports, 1 Fixed AC PSU, 1 RPS port, fan module slot (unpopulated), ExtremeXOS Edge license
16173	X450-G2-24p-GE4-Base	Summit X450-G2 24 10/100/1000BASE-T POE+, 4 1000BASE-X unpopulated SFP, two 21Gb stacking ports, 2 unpopulated power supply slots, fan module slot (unpopulated), ExtremeXOS Edge license
16174	X450-G2-48t-GE4-Base	Summit X450-G2 48 10/100/1000BASE-T, 4 1000BASE-X unpopulated SFP, two 21Gb stacking ports (QSFP), 1 Fixed AC PSU, 1 RPS port, fan module slot (unpopulated), ExtremeXOS L2 Edge license w Policy
16175	X450-G2-48p-GE4-Base	Summit X450-G2 48 10/100/1000BASE-T POE+, 4 1000BASE-X unpopulated SFP, two 21Gb stacking ports, 2 unpopulated power supply slots, fan module slot (unpopulated), ExtremeXOS Edge license
16176	X450-G2-24t-10GE4-Base	Summit X450-G2 24 10/100/1000BASE-T, 4 10GBASE-X unpopulated SFP+, two 21Gb stacking ports, 1 Fixed AC PSU, 1 RPS port, fan module slot (unpopulated), ExtremeXOS Edge license
16177	X450-G2-24p-10GE4-Base	Summit X450-G2 24 10/100/1000BASE-T POE+, 4 10GBASE-X unpopulated SFP+, two 21Gb stacking ports), 2 unpopulated power supply slots, fan module slot (unpopulated), ExtremeXOS Edge license
16178	X450-G2-48t-10GE4-Base	Summit X450-G2 48 10/100/1000BASE-T, 4 10GBASE-X unpopulated SFP+, two 21Gb stacking ports, 1 Fixed AC PSU, 1 RPS port, fan module slot (unpopulated), ExtremeXOS Edge license
16179	X450-G2-48p-10GE4-Base	Summit X450-G2 48 10/100/1000BASE-T POE+, 4 10GBASE-X unpopulated SFP+, two 21Gb stacking ports, 2 unpopulated power supply slots, fan module slot (unpopulated), ExtremeXOS Edge license
16190	Summit X450-G2 Edge to Advanced Edge Lic	ExtremeXOS Advanced Edge License for Summit X450 series switches
11011	Direct Attach Feature Pack	Direct Attach Feature Pack
16200	Summit X450-G2 OpenFlow FeaturePack	ExtremeXOS SDN - OpenFlow Feature Pack for Summit X450 series switches
16169	X450-G2 Multimedia(AVB) Feature Pck	ExtremeXOS Multimedia Service (Audio Video Bridging) Feature Pack for Summit X450 series switches
10941	Summit 1100W PoE AC PSU FB	1100 Watt AC PoE Power Supply module for Summit X460-G2 and X450-G2 series switches with Front-to-Back airflow

PART NUMBER	NAME	DESCRIPTION
10951	Summit 715W AC PSU FB	715W AC PoE Power Supply Module for Summit X460-G2 and X450-G2 series switches with front to back airflow
10945	Summit X460/X450-G2 fan module FB	Fan Module for Summit X460-G2/X450-G2 Series Switches - front to back airflow
10301	10GBASE-SR SFP+	10GBASE-SR SFP+, 850nm, LC Connector, transmission length of up to 300m on MMF
10302	10GBASE-LR SFP+	10GBASE-LR SFP+, 1310nm, LC Connector, transmission length of up to 10km on SMF
10309	10GBASE-ER SFP+	10GBASE-ER SFP+, 1550nm, LC connector, transmission length of up to 40km on SMF
10303	SFP+ LRM Module	10 Gigabit Ethernet SFP+ module, 1310nm, legacy MMF 220m link, LC connector
STK-RPS-150PS	150W Non-PoE RPS	150 watt non-PoE redundant power supply for A, B, C and X450-G2 switches
10936	EPS-C2	External Power System Chassis 2. Accepts up to three Summit 750W AC PoE PSU 48V power supplies. Accepts up to 3 EPS-CBL-2x7 or up to 1 EPS-CBL-2x9 cables
10939	EPS-CBL-2x7	External Power System Cable (1M) that connects EPS to any Summit X440 for providing redundant DC power
10931	Summit 750W AC PSU	AC Power Supply module for EPS-C2 Chassis Redundant Power Supply
10051H	1000BASE-SX SFP, Hi	1000BASE-SX SFP, MMF 220 & 550 meters, LC connector, Industrial Temp
10052H	1000BASE-LX SFP, Hi	1000BASE-LX SFP, MMF 220 & 550 meters, SMF 10km, LC connector, Industrial Temp
10053H	1000BASE-ZX SFP, Hi	1000BASE-ZX SFP, SMF 70km, LC connector, Industrial Temp
10056H	1000BASE-BX-D BiDi SFP, Hi	1000BASE-BX-D SFP, 1490-nm TX/1310-nm RX wavelength, Industrial Temp
10057H	1000BASE-BX-U BiDi SFP, Hi	1000BASE-BX-U SFP, 1310-nm TX/1490-nm RX wavelength, Industrial Temp
10060	100FX/1000LX SFP^	100FX/1000LX SFP, SMF, LC Connector (Requires MCP and 6dB Attenuator for 100FX-MMF Operation)^
10070H	10/100/1000BASE-T SFP, Hi ^	10/100/1000BASE-T, SFP, CAT 5 cable 100m, RJ-45 Connector, Industrial Temp ^
10071H	1000BASE-SX SFP 10 Pack, Hi	1000BASE-SX SFP 10 Pack, Industrial Temp
10072H	1000BASE-LX SFP 10 Pack, Hi	1000BASE-LX SFP 10 Pack, Industrial Temp
10311	QSFP+ passive copper cable, 0.5M	QSFP+ passive copper cable, 0.5M
10312	QSFP+ passive copper cable, 1.0M	QSFP+ passive copper cable, 1.0M
10313	QSFP+ passive copper cable, 3.0M	QSFP+ passive copper cable, 3.0M
10323	QSFP+ passive copper cable, 5.0M	QSFP+ passive copper cable, 5.0M
40GB-C0.5-QSFP	QSFP+ passive copper cable, 0.5M	40 Gb, Copper Direct Attach Cable with integrated QSPF+ transceivers, 0.5m
40GB-C01-QSFP	QSFP+ passive copper cable, 1.0M	40 Gb, Copper Direct Attach Cable with integrated QSPF+ transceivers, 1m
40GB-C03-QSFP	QSFP+ passive copper cable, 3.0M	40 Gb, Copper Direct Attach Cable with integrated QSPF+ transceivers, 3m
40GB-C07-QSFP	QSFP+ passive copper cable, 7.0M	40 Gb, Copper Direct Attach Cable with integrated QSPF+ transceivers, 7m
10304	10GBASE-CR SFP+ 1m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 1m
10305	10GBASE-CR SFP+ 3m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 3m
10306	10GBASE-CR SFP+ 5m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 5m
10307	10GBASE-CR SFP+ 10m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 10m

^ - 1Gb Mode Only



<http://www.extremenetworks.com/contact> / Phone +1-408-579-2800

©2015 Extreme Networks, Inc. All rights reserved. Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries. All other names are the property of their respective owners. For additional information on Extreme Networks Trademarks please see <http://www.extremenetworks.com/company/legal/trademarks/>. Specifications and product availability are subject to change without notice. 9718-0615-23